



WWW.TORQLITE.COM

8 DUFRESNE LOOP LULING, LA 70070
(985) 785-3075

11050 W LITTLE YORK BLDG. I HOUSTON, TX 77041
(713) 983-7171

ISO 9001 REGISTERED

POWER CONSOLES

HYDRAULIC PUMPS



These pumps have been continually upgraded over the last 40 years and even some of the originals are still in service. Equipped with a 1½ hp, single-phase universal motor, they have a noise level of 90-95 dB(A). Offer an incredible weight-to-performance ratio for any of our electric/hydraulic pumps, and are CSA rated for intermittent duty.

TWO-SPEED HIGH PERFORMANCE PUMP
EXTERNAL ADJUSTABLE PRESSURE REGULATOR
RETRACT SIDE INTERNAL RELIEF VALVE
USE FOR DOUBLE OR SINGLE ACTING TOOLS
HAND REMOTE CONTROL WITH 30-FOOT CORD

USE WHERE AIR IS THE PREFERRED SOURCE OF POWER
EXTERNAL ADJUSTABLE PRESSURE REGULATOR
RETRACT SIDE INTERNAL RELIEF VALVE
USE FOR DOUBLE OR SINGLE ACTING TOOLS
PNEUMATIC REMOTE CONTROL WITH 30-FOOT CORD
POWERFUL 3 HP MOTOR STARTS UNDER LOAD



Hydraulic power unit engineered to continuously and reliably operate a variety of hydraulically powered torque wrenches operating up to 700 bar / 10,150 psi.

This compact design utilizes a finned housing with integral fan that eliminates the need for an external cooler. Directly mounted pressure and directional control valves eliminate additional plumbing and potential leak points while keeping the unit compact.

Pendant control for manual advance and automatic retract operation.



WWW.TORQLITE.COM

8 DUFRESNE LOOP LULING, LA 70070
(985) 785-3075

11050 W LITTLE YORK BLDG. I HOUSTON, TX 77041
(713) 983-7171

ISO 9001 REGISTERED

POWER CONSOLES

TL-SEHC PUMP



CONSOLE MODEL	SOURCE	POWER REQ.	OIL DELIVERY	OIL RESERVOIR	USABLE OIL	OVERALL WIDTH	OVERALL LENGTH	OVERALL HEIGHT	WEIGHT WITH OIL
TL-SEHC	Electric 1-1/8 HP	115V, 110V, 220V	704 in. ³ @ 100 psi 56 in. ³ @ 10,000 psi	2.5 gallons	525 in. ³	17.14 in.	9.5 in.	18.12 in.	75 lbs.

ELECTRIC MOTOR

1-1/8 HP, 12,000 rpm
115V, 25 amps
110V/50Hz, 25 amps
220V/50Hz, 13 amps

TL-SAHC PUMP



CONSOLE MODEL	SOURCE	OIL DELIVERY	OIL RESERVOIR	USABLE OIL	OVERALL WIDTH	OVERALL LENGTH	OVERALL HEIGHT	WEIGHT WITH OIL
TL-SAHC	Pneumatic 3 HP	465 in. ³ @ 100 psi 55 in. ³ @ 10,000 psi	2.5 gallons	590 in. ³	16.55 in.	9.5 in.	19.83 in.	65 lbs.



ISO 9001 REGISTERED


8 DUFRESNE LOOP LULING, LA 70070
(985) 785-3075

11050 W LITTLE YORK BLDG. I HOUSTON, TX 77041
(713) 983-7171

WWW.TORQLITE.COM

POWER CONSOLES

TL-TP PUMP

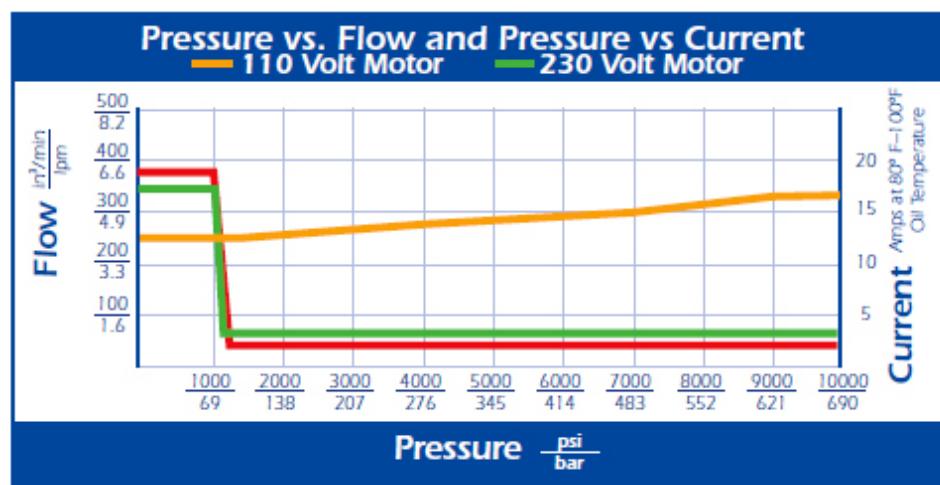

MODEL NUMBER	MOTOR VOLTAGE	ELECTRICITY	POWER	MAXIMUM NAMEPLATE CURRENT	MAXIMUM ADVANCE PRESSURE	PRESSURE @ 15 AMP MOTOR CURRENT	RETRACT PRESSURE
TL-TP (110)	110/120V	60Hz One phase	1.5 KW 2 HP	20.5 A	700 bar 10,150 psi	475-500 bar 6,890-7,250 psi	120 bar 1,740 psi
TL-TP (230)	230V	50Hz One phase	1.5 KW 2 HP	10.5 A	700 bar 10,150 psi	n/a n/a	120 bar 1,740 psi

MODEL NUMBER	ADVANCE FLOW RATE 0-100 BAR / 0-1,500 PSI	ADVANCE FLOW RATE 100-700 BAR / 1,500-10,150 PSI	RESERVOIR CAPACITY	USABLE OIL	NOISE LEVEL @ 300 BAR	UNIT WEIGHT WITH OIL	CONTROL PENDANT LENGTH
TL-TP (110)	6.31 lpm 386 in. ³ /min.	0.91 lpm 52 in. ³ /min.	3.7 liter 1.0 gallon	1.7 liter 0.5 gallon	68-70 dB	34 kg 75 lbs.	6 meters 20 feet
TL-TP (230)	5.60 lpm 340 in. ³ /min.	1.10 lpm 67 in. ³ /min.	3.7 liter 1.0 gallon	1.7 liter 0.5 gallon	68-70 dB	34 kg 75 lbs.	6 meters 20 feet